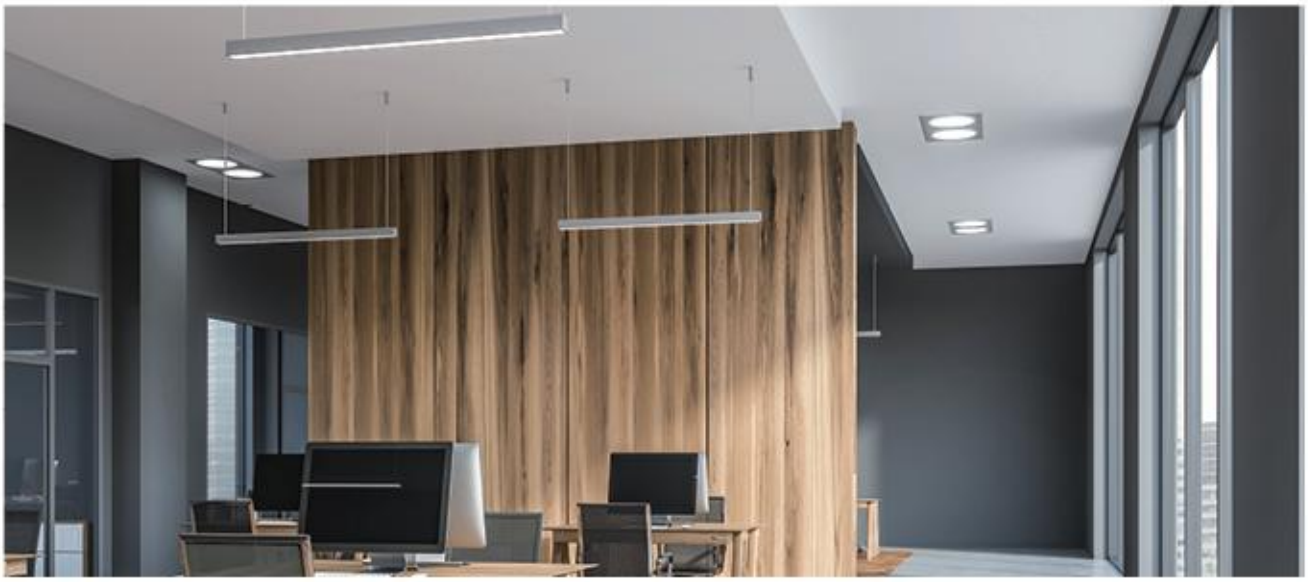


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:

All options are factory installed. All accessories are field installed

CONNECTABLE LINEAR

Features

IP20

5 YEAR WARRANTY


1.Linkable linear light with continuous line-of illumination

2. Durable steel housing with powder spraying RAL9016 white.Antimicrobial finish available

3. PC End cap & Opal ribbed PC diffuser provide even illumination with comfortable appeal.Flame resistance

4. Suspended mount IP51

5. Surface/Suspended mount, Square pole ceiling mount are collected. Easy install

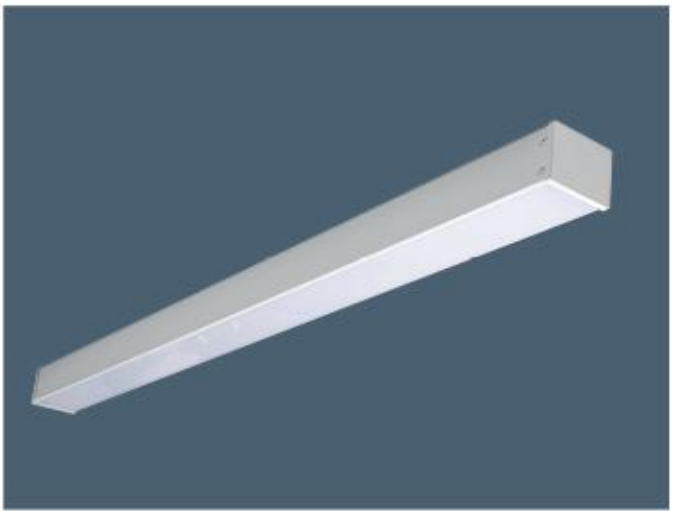

Ordering guide

Example: 71X1200-37W48L840-DALI-

Code	Width (mm)	Length (mm)	Power (W)	Lm/W	Lumens(lm)		CRI		Color temp.		Driver		Options
S14-60-15	78	615	15W	100	15L	1500	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish
S14-90-25	78	915	25W	110	27L	2750	9	90CRI	35	3500K	DALI	DALI-2	
S14-120-36	**78**	**1215**	**36W**	**120**	**43L**	**4356**	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor
S14-120-N35	78	1215	35W	120	42L	4200			50	5000K	BL	Bluetooth	Emergency Backup
S14-150-42	78	1515	42W	125	52L	5250			57	5700K	TR	Triac	
S14-150-N40	78	1515	40W	120	48L	4800			65	6500K	WA	Watt Adjustable	Push dim
									CCT	Adjustable			Touch dim
													Remote control
									R/G/B	RGB			

Packages:

Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
S14-60-	10	36	67	18	9	0.0434	
S14-90-	10	36	97	18	12	0.0629	
S14-120-	8	29	127	18	14	0.0663	
S14-150-	8	29	157	18	19	0.0820	

Foototes:

Accessories (order separately) 1. Suspended mount Kit 2. Square pole ceiling Kit 3. Join bracket

