■ Function A

CCT&Watt adjustable
by Dip switch





3000K 4000K 6500K 3000K Night Light

■ Function C Motion&daylight sensor but without Nightlight



During the day



Light is insufficient



When the person leaves

■ Function B



ON/OFF/CCT adjustable
by Switch


CCT



3000K 4000K 6500K 3000K Night Light

■ Function D Remote control with RGB nightlight






Surface Mounted



Recessed



Steel wire suspension



Pendant rod suspension

CEILING LIGHT

IP40


Features

1.Low glare UGR<19, even illumination with comfortable appeal.

2.180-260V AC input,50/60Hz,PF>0.9,Watt & CCT Adjustable

3.Strong PC housing,MS/PMMA LGP and PS diffuser. Long lifetime

4.Four in one mounting solution: Surface mount, Suspended cable or rod mount, Recessed mount

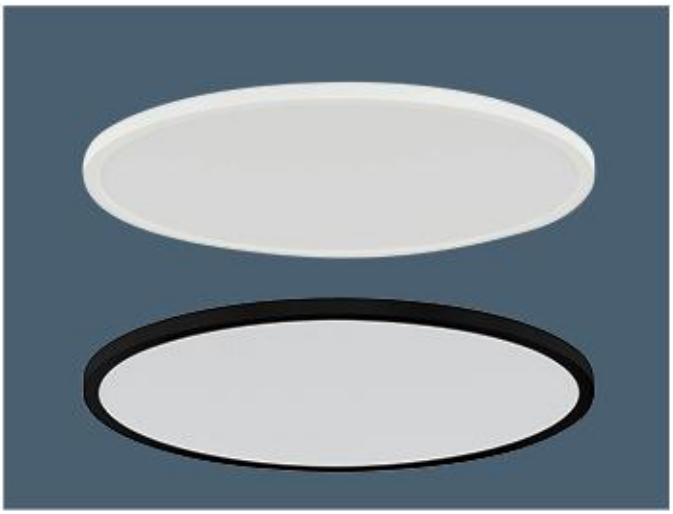

Ordering guide

Code	Width (mm)	Length (mm)	Power (W)	Lumens (lm)	CRI		Color temp.		Driver		Options
R60-283-24	**20**	**283**	**24W**	**24L 2400**	8	80CRI	30	3000K	DIM	0-10V Dimming	16-20-24W+2W /Cut out 250mm
R60-383-32	20	383	32W	32L 3200	9	90CRI	35	3500K	DALI	DALI-2	24-28-32W+2W /Cut out 350mm
R60-483-40	22	483	40W	40L 4000	FS	Full Spectrum	40	4000K	ZI	Zigbee	32-36-40W+3W /Cut out 450mm
R60-583-48	22	583	48W	48L 4800			50	5000K	BL	Bluetooth	40-44-48W+3W /Cut out 550mm
							57	5700K	TR	Triac	Motion Sensor
							65	6500K	WA	Watt Adjustable	Push dim
							CCT	Adjustable			Touch dim
							R/G/B	RGB			Remote control

Packages:	Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
	R60-283-	10	31	31	28	13	0.0269	
	R60-383-	10	41	41	28	16	0.0471	
	R60-483-	5	51	51	15.5	15	0.0403	
	R60-583-	5	61	61	15.5	18	0.0577	

Foototes: Accessories (order separately) 1. Recessed mount Kit 2. Pendant cable Kit 3. Pendant rod Kit

Installation accessories



