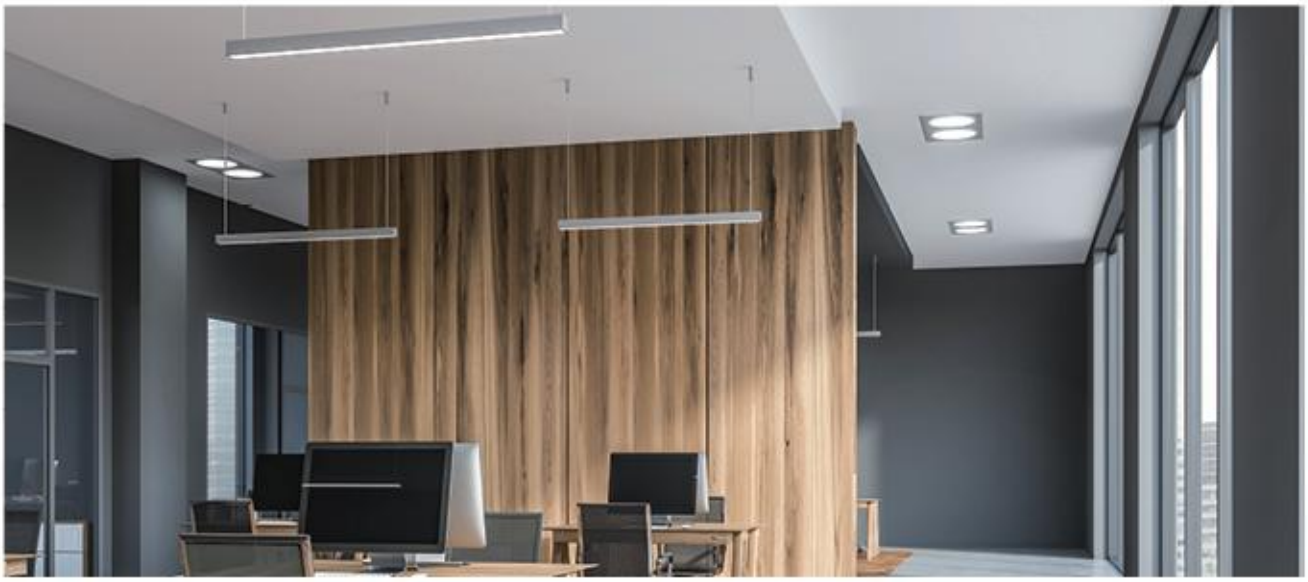


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:

All options are factory installed. All accessories are field installed


LINEAR LIGHT

Features

IP20

5 YEAR WARRANTY

1.High efficiency130L/W, brighter and energy saving more. Low glare light output UGR<21 optional:UGR<19
2.Familiar installation design; IP50 light module,Dust & insect-proof,Dust-proof & insect-proof
3.Durable steel housing with powder spraying RAL9016 white.Antimicrobial finish available
4.Frosted PC diffuser provides even illumination with comfortable appeal.PS,PMMA available. Optional:Ribbed,Prism
5. OEM/ODM available

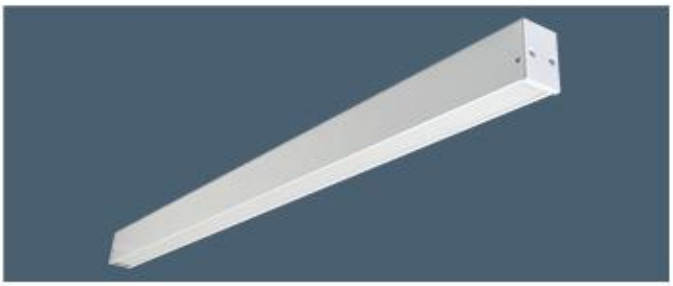





Ordering guide


Example: 51x1200-15W18L840-DALI-


Code	Width (mm)	Length (mm)	Power (W)	Lm/ W	Lumens(lm)		CRI		Color temp.		Driver		Options
S22-560-15	51	600	15W	110	16L	1650	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish
S22-590-15	51	900	15W	100	15L	1500	9	90CRI	35	3500K	DALI	DALI-2	
S22-590-25	51	900	25W	120	30L	3000	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor
S22-5120-15	51	**1200**	**15W**	**120**	**18L**	1800			50	5000K	BL	Bluetooth	Emergency Backup
S22-5120-37	51	1200	37W	130	48L	4810			57	5700K	TR	Triac	
S22-5120-N19	51	1200	19W	110	20L	2090			65	6500K	WA	Watt Adjustable	Push dim
S22-5150-21	51	1500	21W	110	23L	2310			CCT	Adjustable			Touch dim
S22-5150-42	51	1500	42W	130	54L	5460							Remote control
S22-5150-N40	51	1500	40W	120	48L	4800			R/G/B	RGB			

Packages:	Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
	S22-560-	10	15	62	28	11	0.0260	
	S22-590-	10	15	92	28	15	0.0386	
	S22-5120-	8	15	122	24	18	0.0439	
	S22-5150-	8	15	152	24	19	0.0547	

Foototes: Accessories (order separately) 1. Suspended mount Kit 2. Square pole ceiling Kit 3. Join bracket







1800lm norminal delivered lumens of S22-5120-15