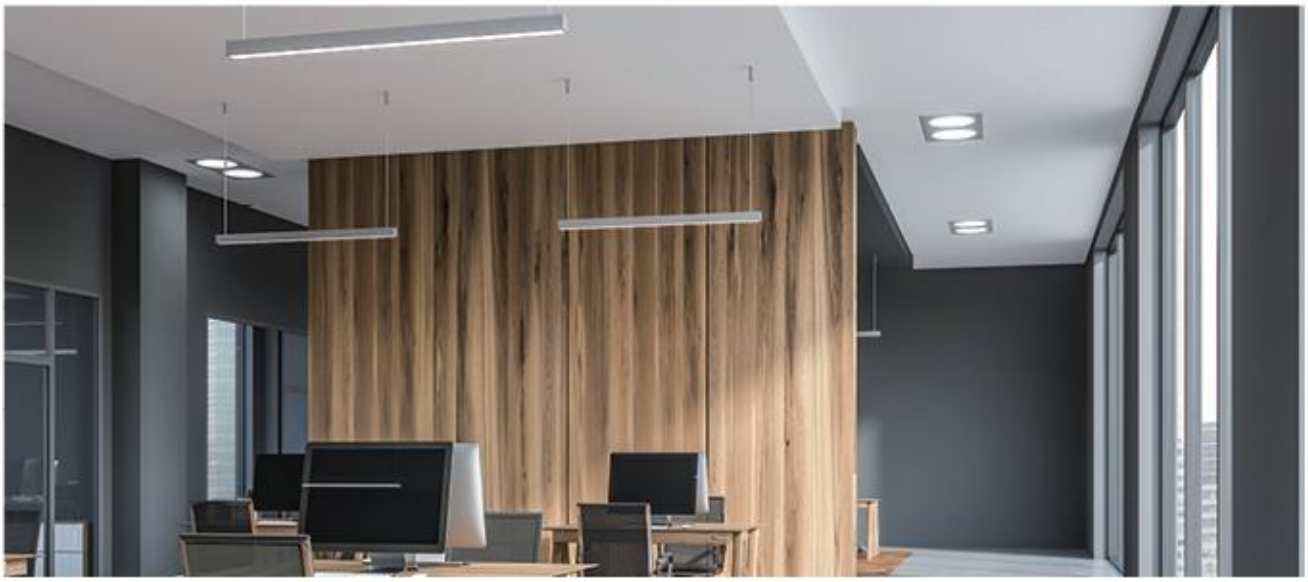


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:


All options are factory installed. All accessories are field installed

LINEAR LIGHT

Features

IP20



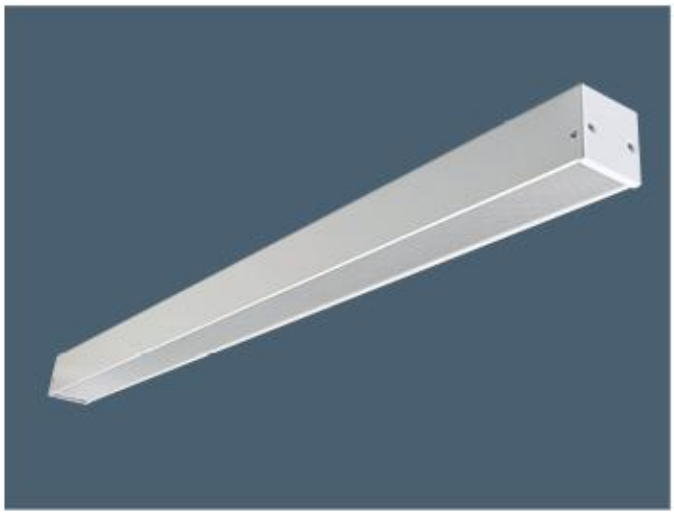

Ordering guide

Example: 71X1200-37W48L840-DALI-

Code	Width (mm)	Length (mm)	Power (W)	Lm/ W	Lumens (lm)		CRI		Color temp.		Driver		Options
S22-760-15	71	600	15W	120	18L	1800	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish
S22-790-25	71	900	25W	120	30L	3000	9	90CRI	35	3500K	DALI	DALI-2	
S22-7120-37	**71**	**1200**	**37W**	**130**	**48L**	**4810**	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor
S22-7120-37/UGR<19	**71**	**1200**	**37W**	**110**	**40L**	**4070**			50	5000K	BL	Bluetooth	Emergency Backup
S22-7120-N35	71	1200	35W	120	42L	4200			57	5700K	TR	Triac	
S22-7150-42	71	1500	42W	130	54L	5460			65	6500K	WA	Watt Adjustable	Push dim
S22-7150-N40	71	1500	40W	130	52L	5200			CCT	Adjustable			Touch dim
													Remote control
									R/G/B	RGB			

Packages:	Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
	S22-760-	10	36	65	17	12	0.0398	
	S22-790-	10	36	95	17	17	0.0581	
	S22-7120-	8	29	125	17	18	0.0616	
	S22-7150-	8	29	155	17	21	0.0764	

Foototes: Accessories (order separately) 1. Suspended mount Kit 2. Square pole ceiling Kit 3. Join bracket



