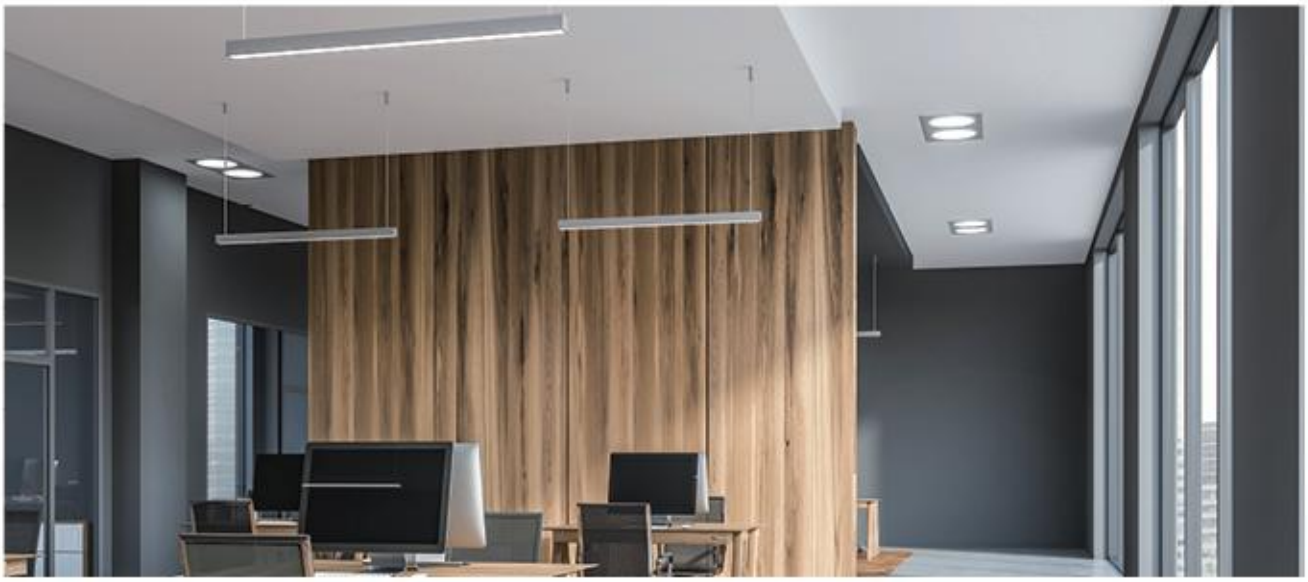


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:

All options are factory installed. All accessories are field installed


LINEAR LIGHT

Features

IP20

5 YEAR WARRANTY

1.High efficiency130L/W, brighter and energy saving more. Low glare light output UGR<21 optional:UGR<19
2.Familiar installation design; IP50 light module,Dust & insect-proof,Dust-proof & insect-proof
3.Durable steel housing with powder spraying RAL9016 white.Antimicrobial finish available
4.Frosted PC diffuser provides even illumination with comfortable appeal.PS,PMMA available. Optional:Ribbed,Prism
5. OEM/ODM available

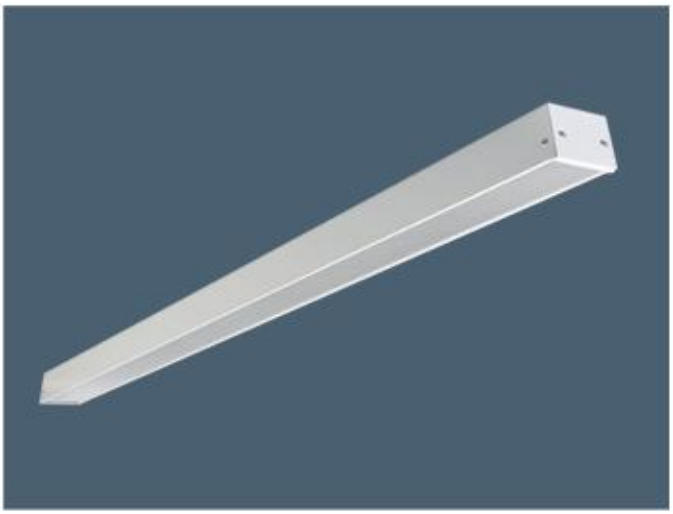

Ordering guide

Example: 91X1200-54W70L840-DALI-

Code	Width (mm)	Length (mm)	Power (W)	Lm/ W	Lumens(lm)		CRI		Color temp.		Driver		Options
S22-960-25	91	600	25W	120	30L	3000	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish
S22-990-37	91	900	37W	130	48L	4810	9	90CRI	35	3500K	DALI	DALI-2	
S22-9120-60	**91**	**1200**	**54W**	**130**	**70L**	**7020**	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor
S22-9120-N52	91	1200	52W	120	62L	6240			50	5000K	BL	Bluetooth	Emergency Backup
S22-9150-N58	91	1500	58W	130	75L	7540			57	5700K	TR	Triac	
S22-1160-30	108	600	30W	130	39L	3900			65	6500K	WA	Watt Adjustable	Push dim
S22-1190-42	108	900	50W	130	65L	6500			CCT	Adjustable			Touch dim
													Remote control
									R/G/B	RGB			

Packages:	Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
	S22-960-	12	31	62	29	15	0.0557	
	S22-990-	10	31	92	29	21	0.0827	
	S22-9120-	8	31	122	21	18	0.0794	
	S22-9150-	4	16	152	21	12	0.0511	
	S22-1160-	12	31	62	35	16	0.0673	
	S22-1190-	8	31	92	24	15	0.0684	

Foototes: Accessories (order separately) 1. Suspended mount Kit 2. Square pole ceiling Kit 3. Join bracket

