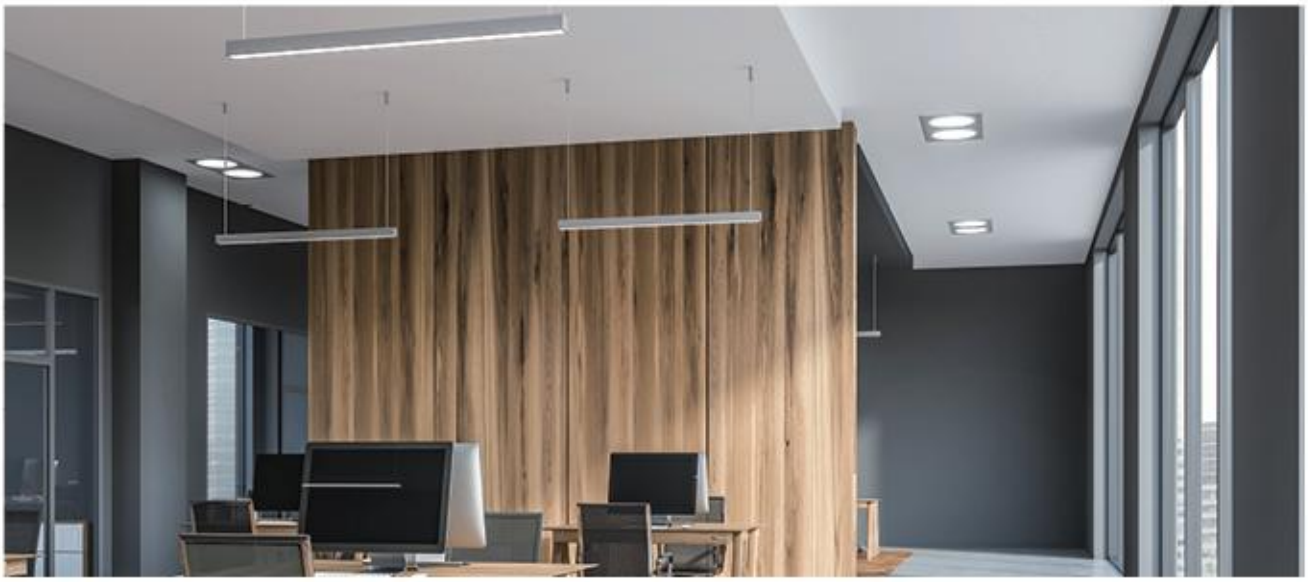


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:

All options are factory installed. All accessories are field installed

BATTEN&STRIP

Features

IP20

5 YEAR WARRANTY



1.Wide beam angle degree.High efficiency 160Lm/W, brighter and energy saving more
2.PC End cap & Frosted ribbed PC diffuser provides even illumination with comfortable appeal.Flame resistance
3.Familiar installation & Anti-fall safety design; IP50 Light module,Dust-proof & insect-proof
4.Three-in-one mounting solution: Surface/Suspended mount, square pole ceiling mount
5.Durable steel housing with powder spraying RAL9016 white.Antimicrobial finish available
6.OEM/ODM available.

Ordering guide

Example: 72X1200-36W55L840-DALI-

Code	Width (mm)	Length (mm)	Power (W)	Lm/W	Lumens (lm)		CRI		Color temp.		Driver		Options	Notes
S36-60-15	72	610	15W	130	19L	1950	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish	
S36-120-30	72	1210	30W	160	44L	4480	9	90CRI	35	3500K	DALI	DALI-2		
S36-120-36	**72**	**1210**	**36W**	**150**	**55L**	**5550**	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor	
S36-150-42	72	1510	42W	150	63L	6300			50	5000K	BL	Bluetooth	Emergency Backup	
S36-60-N18	72	610	18W	130	23L	2340			57	5700K	TR	Triac		
S36-120-N36	72	1210	36W	150	54L	5400			65	6500K	WA	Watt Adjustable	Push dim	
S36-150-N40	72	1510	40W	150	60L	6000			CCT	Adjustable			Touch dim	
S36-150-N60	72	1510	60W	150	90L	9000							Remote control	
									R/G/B	RGB				

Packages:	Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
	S36-60-	20	35	62	38	17	0.0825	
	S36-90-	10	18	92	38	13	0.0629	
	S36-120-	10	18	122	38	18	0.0834	
	S36-150-	8	18	152	31	18	0.0848	

Foototes: Accessories (order separately) 1. Suspended mount Kit 2. Square pole ceiling Kit 3. Join bracket

