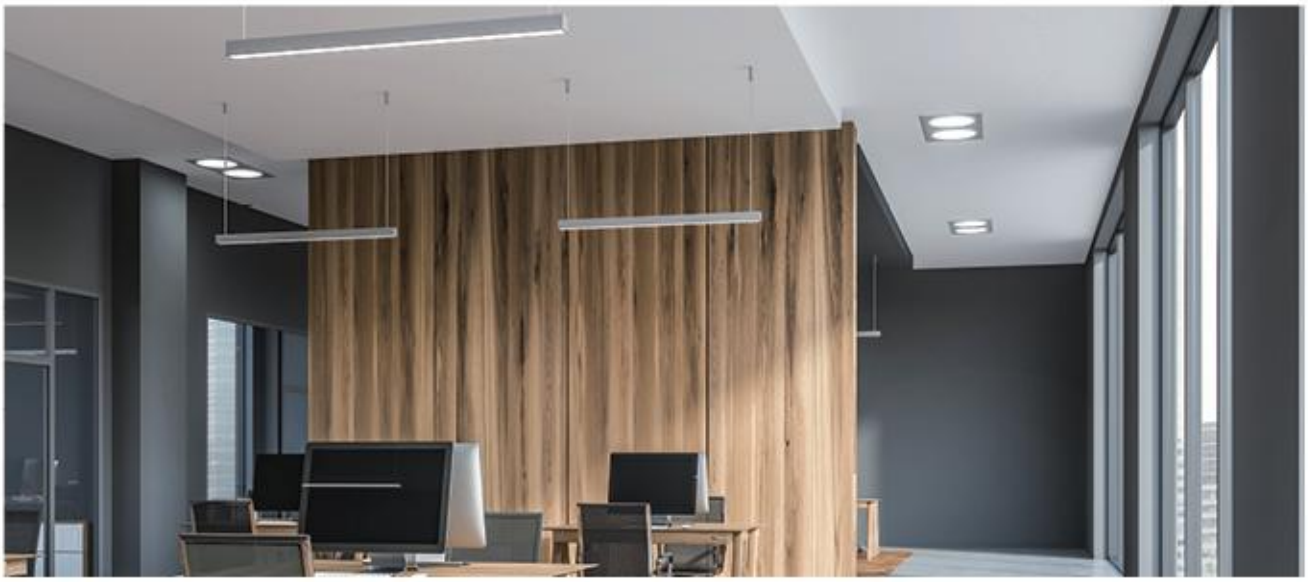


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:

All options are factory installed. All accessories are field installed

GLOW UP & DOWN LINEAR

Features

IP20

5 YEAR WARRANTY



1.Glow up and down.Illuminate the ceiling & Space
2.High efficiency130L/W, brighter and energy saving more. Low glare light output UGR<21 optional:UGR<19
3.Familiar suspended installation.IP50 light module,Dust & insect-proof
4.Durable steel housing with powder spraying RAL9016 white.Antimicrobial finish available
5.Frosted PC diffuser provides even illumination with comfortable appeal.PS,PMMA available. Optional:Prism
6.OEM/ODM available

Ordering guide

Example: 51X1200-25W30L840-

Code	Width (mm)	Length (mm)	Power (W)	Lm/W	Lumens (lm)	CRI		Color temp.		Driver		Options	Notes
S24-5120-25	**51**	**1200**	**25W**	**120**	**30L 3000**	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish	70%DOWN-30%UP
S24-5150-33	51	1500	33W	120	39L 3960	9	90CRI	35	3500K	DALI	DALI-2		70%DOWN-30%UP
S24-7120-42	71	1200	42W	140	58L 5880	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor	80%DOWN-20%UP
S24-7150-55	71	1500	55W	130	65L 6500			50	5000K	BL	Bluetooth	Emergency Backup	80%DOWN-20%UP
								57	5700K	TR	Triac		
								65	6500K	WA	Watt Adjustable	Push dim	
								CCT	Adjustable			Touch dim	
								R/G/B	RGB			Remote control	

Packages:

Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
S24-5120-	8	15	122	24	15	0.0439	
S24-5150-	8	15	152	24	19	0.0547	
S24-7120-	8	15	122	24	15	0.0439	
S24-7150-	8	15	152	24	19	0.0547	

Foototes: Accessories (order separately) 1. Suspended mount Kit 2. Join bracket



