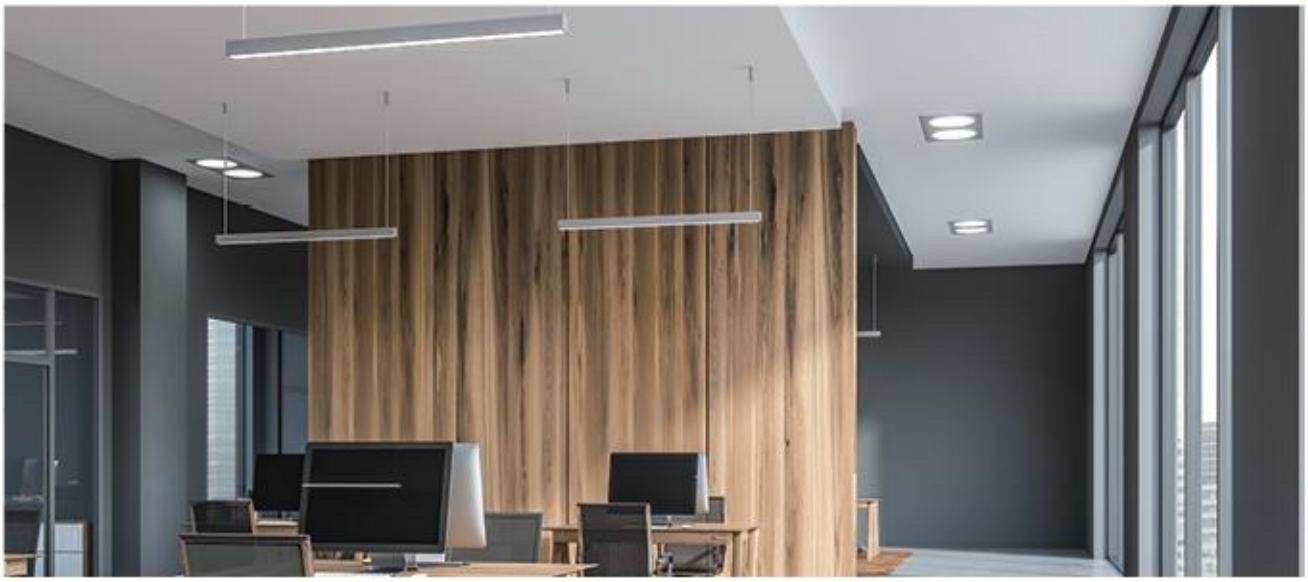


SURFACE/SUSPENDED LOW BAY LUMINAIRE

HOUSING:

Die-formed, steel sheet Metal housing provides excellent heat transfer to extend component life
PC diffuser(Frosted/Ribbed/Prism) provides even illumination with comfortable appeal.Flame resistance and long lifetime

FINISH:

Highly reflective, matte powder coat RAL9016 white for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior.
Antimicrobial finish or custom finishes are also available.

ELECTRICAL:

220-240V,PF>0.9,Isolated(SELV),Optional: Tridonic, Philips, Eaglerise,Lifud etc.Other driver also available
2835 SMD led chip,SDCM<4,TM-21 predicted L70 lumen maintenance more than 60,000 hours.Optional: Bridgelux,Osram, Epistar,San'an etc.
Aluminum PCB:0.8-1.0mm thickness,1.0-1.5 heat conduction
Fixtures are factory pre-wired and tested for all circuits

OPTIONS:

1. Motion & daylight sensor installed;
2. Emergency backup battery pack installed: 90 or 180min, 3-30W continuous power, Class 1 rated output, Emergency lumen typical output: 900lm

WARRANTY:

5 years manufacturer's limited warranty.

GENERAL NOTES:

All options are factory installed. All accessories are field installed


WRAPAROUND

Features

IP20

5 YEAR WARRANTY

1.Wide beam angle degree.High efficiency 160Lm/W, brighter and energy saving more
2.PC End cap & Prism/ribbed PC diffuser provides even illumination with comfortable appeal,UGR<19. Flame resistance
3.Familiar installation design; Suspended mount IP51,Dust-proof & insect-proof
4.Durable steel housing with powder spraying RAL9016 white.Antimicrobial finish available
5.OEM/ODM available.

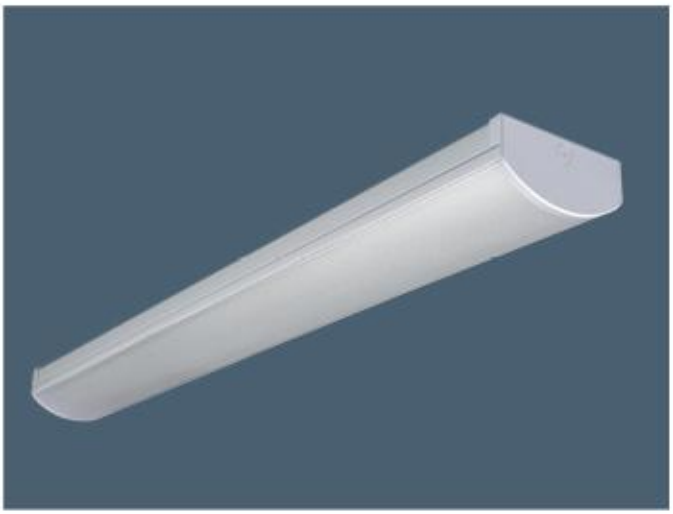

Ordering guide

Example: 170X1220-28W44L840-DALI-

Code	Width (mm)	Length (mm)	Power (W)	Lm/W	Lumens (lm)	CRI		Color temp.		Driver		Options	Notes
S40-60-15	170	625	15W	130	19L	1950	8	80CRI	30	3000K	DIM	0-10V Dimming	Antimicrobial finish	
S40-120-28	**170**	**1220**	**28W**	**160**	**44L**	**4480**	9	90CRI	35	3500K	DALI	DALI-2		
S40-120-43	170	1220	43W	150	64L	6450	FS	Full Spectrum	40	4000K	ZI	Zigbee	Motion Sensor	
S40-150-43	170	1520	43W	150	64L	6450			50	5000K	BL	Bluetooth	Emergency Backup	
S40-150-60	170	1520	60W	140	84L	8400			57	5700K	TR	Triac		
S40-60-N18	170	625	18W	130	23L	2340			65	6500K	WA	Watt Adjustable	Push dim	
S40-120-N50	170	1220	50W	140	70L	7000			CCT	Adjustable			Touch dim	
S40-120-N70	170	1220	70W	130	90L	9100							Remote control	
S40-150-N60	170	1520	60W	140	84L	8400			R/G/B	RGB				
S40-150-N80	170	1520	80W	130	104L	10400								

Packages:	Code	Pcs	Width(cm)	Length(cm)	Height(cm)	Weight(KG)	Volume(CBM)	NOTES
	S40-60-	2	19	65	20	3.5	0.0247	
	S40-120-	2	19	125	20	6	0.0475	
	S40-150-	2	19	155	20	8	0.0589	

Foototes: Accessories (order separately) 1. Suspended mount Kit 2. Join bracket





